



INSTALLATION INSTRUCTIONS

Part Number SU-2588

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

INSTALLATION

1. Remove the stock air filter.
2. Remove the plastic mounting bracket from stock air filter and screw it onto the K&N Filtercharger®.
3. Carefully clean around the intake tube.
Note: This area must be clean and dry in order for the gasket to firmly stick to the air box.
4. Apply the provided gasket around the intake tube. (Fig. 1)
5. Place the open end of the K&N Filtercharger® over the intake tube making sure to position the plastic bracket on the filter with the “Y” facing up. (Fig. 2)
6. With the filter in place and the “Y” portion of the plastic bracket facing up, slide the retaining bracket in between the filter bracket and the air box to lock the filter in place.
Note: You may need to hold the filter in place with one hand while using the other hand to slide the retainer in.
7. Reinstall the air box lid.

Available to purchase separately

Precharger Wrap; AC-3098PK

Precleaner Wrap; 25-2588

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

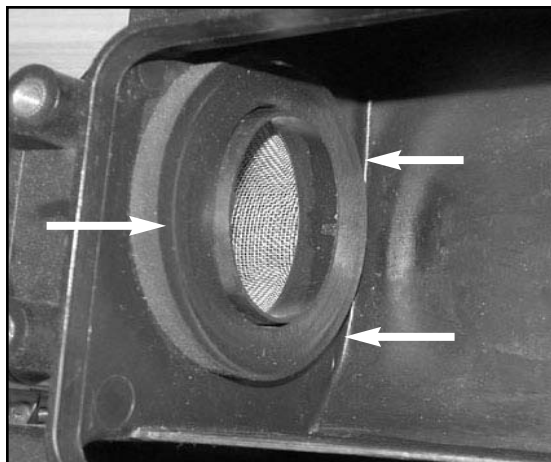


Fig. 1

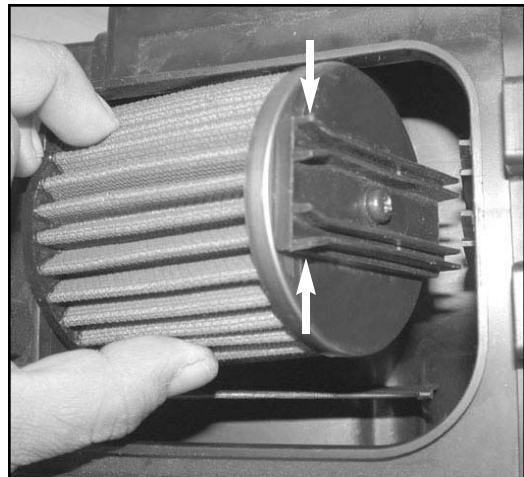


Fig. 2