



INSTALLATION INSTRUCTIONS

Part Number HA-0011

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N® Air Filter seals properly.

INSTALLATION

- 1) Remove the eight screws retaining the air box lid.
- 2) Take off the lid and carefully remove the original air filter.
- 3) Cover the carburetor intakes to ensure nothing falls into the engine.
- 4) Clean the inside of the air box.
- 5) Uncover the carburetor intakes.
- 6) Position the provided blanking caps. (Fig. 1)
- 7) Install the K&N® Air Filter in the air box. (Fig. 2)
- 8) Install the air box lid and tighten each screw down a little at a time. This will give equal pressure all the way around the perimeter.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

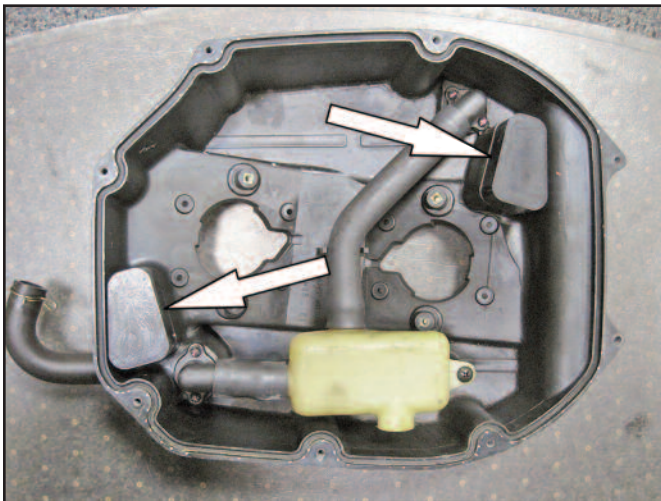


Fig. 1

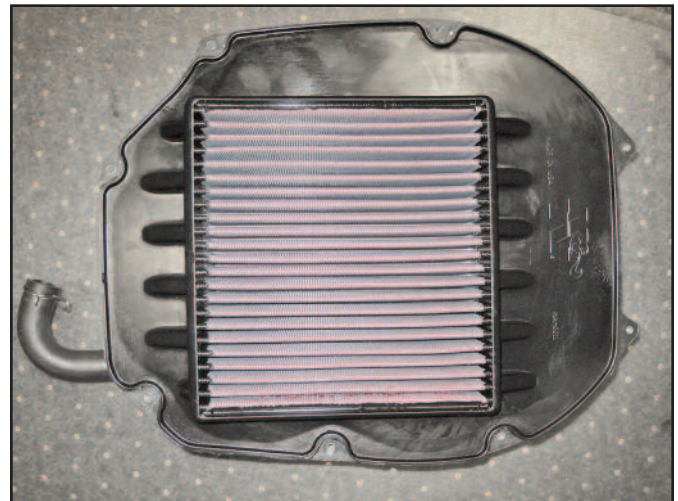


Fig. 2

Technical Department Monday to Friday 9am - 5pm: TEL:- 01925 636950. Fax:- 01925 418948